

210x297mm (A4)



INDIA'S BEST SELLING INNER COLLECTION



A QUALITY PRODUCT BY DIVYA SAI
DIVYA SAI LAM PVT. LTD.
BALANGAR, HYDERABAD



NOV-25





ELEVATE YOUR SPACE WITH CATCH LINE & CATCH EDGEBANDS .

For us, it's not merely about the products; rather, it's an unwavering education driven by pure passion. DETAIL SURFACE' brand purpose is to help you coin a whole new design language of your own as a designer and express your creativity, passion and vision into every project. It's our aim to not just meet your expectations but exceed them with future-ready ideas, game-changing products and life-enhancing quality.


So that you can DETAIL SURFACE

WELCOME TO BEGINNINGS


Catch Line presents its latest collection of high quality laminate sheets in varied finishes, designs, and shades. Catch Line has perfected the manufacturing process over the year to cater to the demands of contemporary consumers. Today, Catch Line is here with 3 distinct series Plain Color, Fabric, and Wooden. These cover a spectrum of fascinating laminate surfaces, which are also 100% phenolic and ISI certified. So, choose Catch Line to create timelessly impressive ambiances.



PASTEL COLOURS



PR-111 SF ★★




PR-112 SF ★★



PR-113 SF ★★



PR-114 SF ★★



PR-115 SF ★★



PR-119 SF ★★



PR-120 SF ★★




PR-122 SF ★★


A Soft Touch
of Elegance
Beneath Your
Feet.



PLAINS




SF | MT 101
POLAR WHITE




HG-101
POLAR WHITE




SF | MT 102
EGG WHITE



HG-102
ARCTIC WHITE



SF | MT 107
SILVER GREY



SF | MT 106
MF STEEL GREY



SF | MT 108
MF PEBBLE GREY




SF | MT 110
MF SOFT BLACK



FABRICS



INDIA'S
BEST SELLING
INNER
COLLECTION

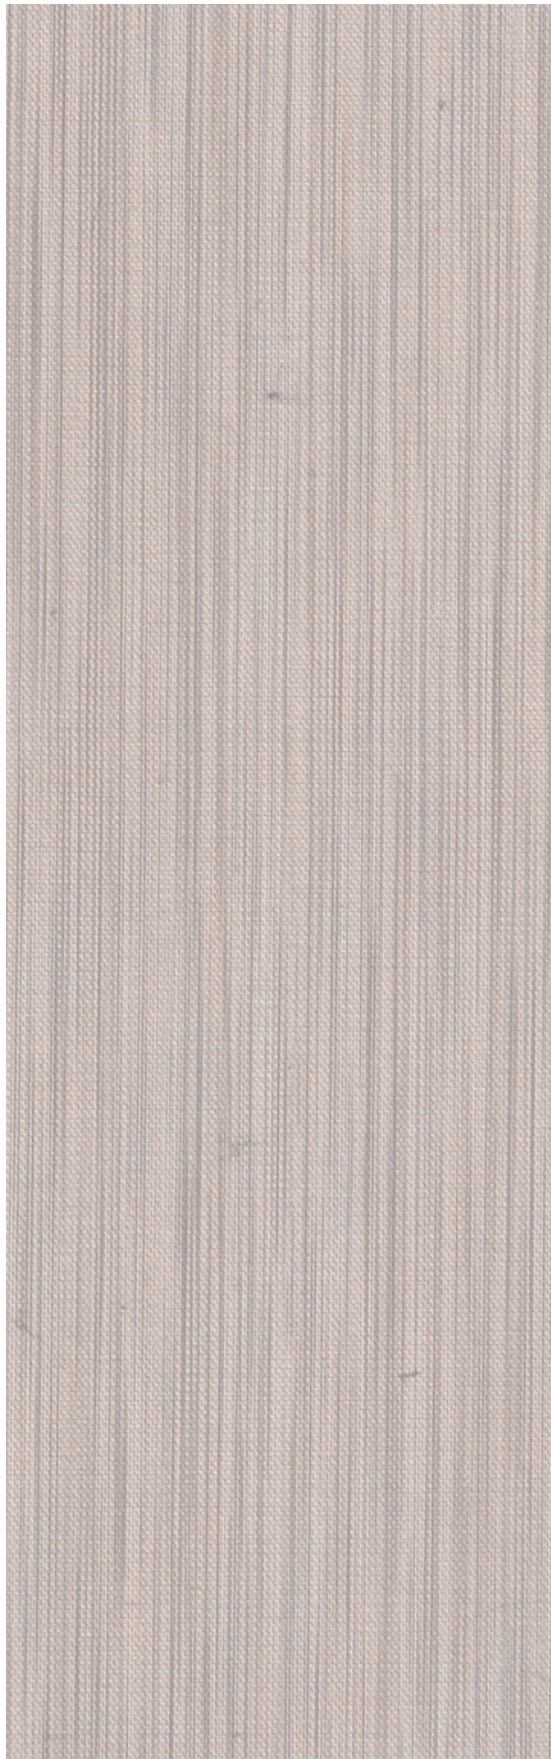

FB-203 SF | MT



FB-212 SF | MT



FB-294 SF | MT

FABRICS



FB-207 SF | MT




FB-208 SF | MT

FB-256 SF | MT


FABRICS




FB-269 SF | MT

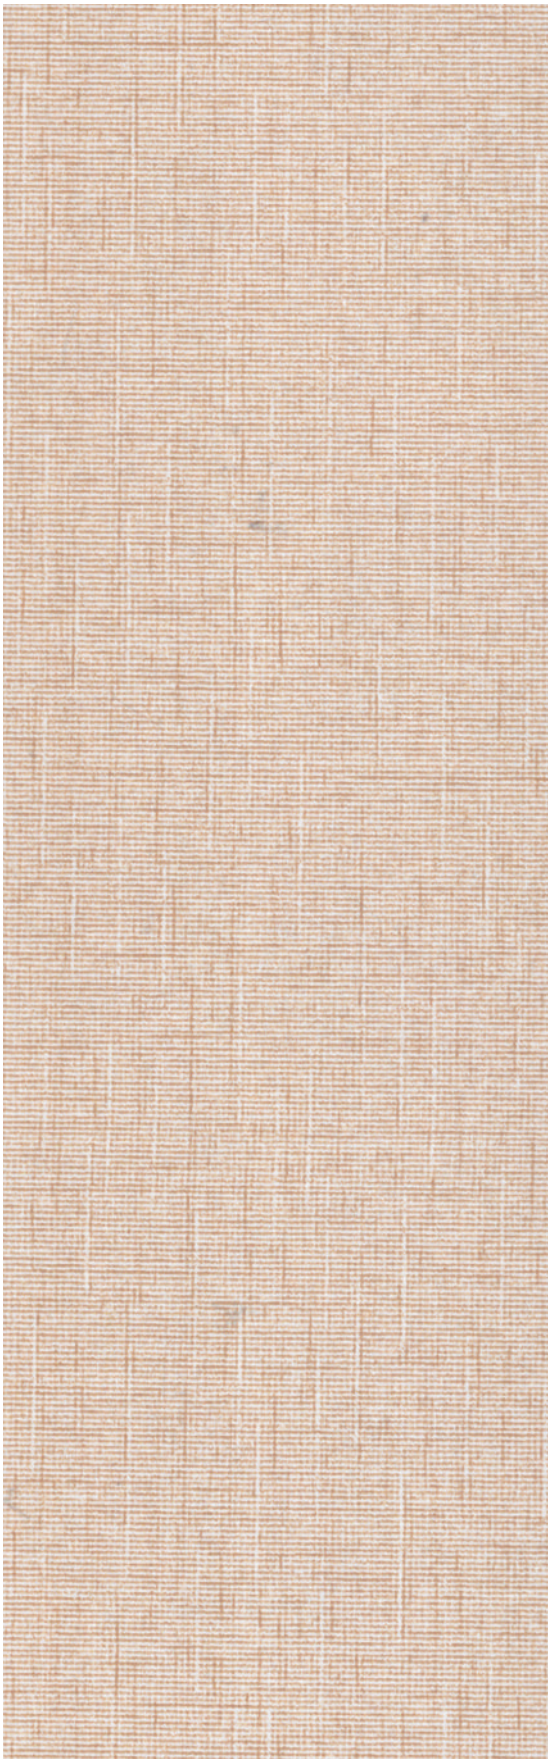

FB-215 SF | MT

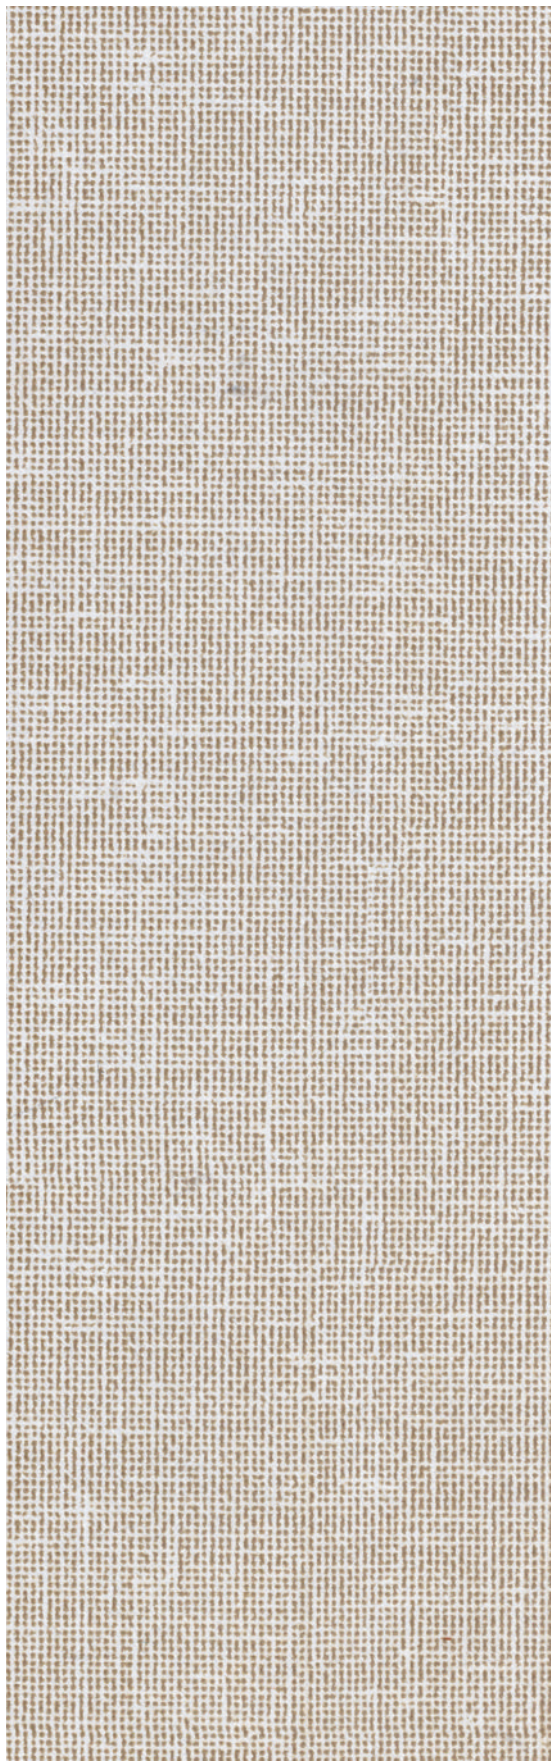

FB-201 SF | MT

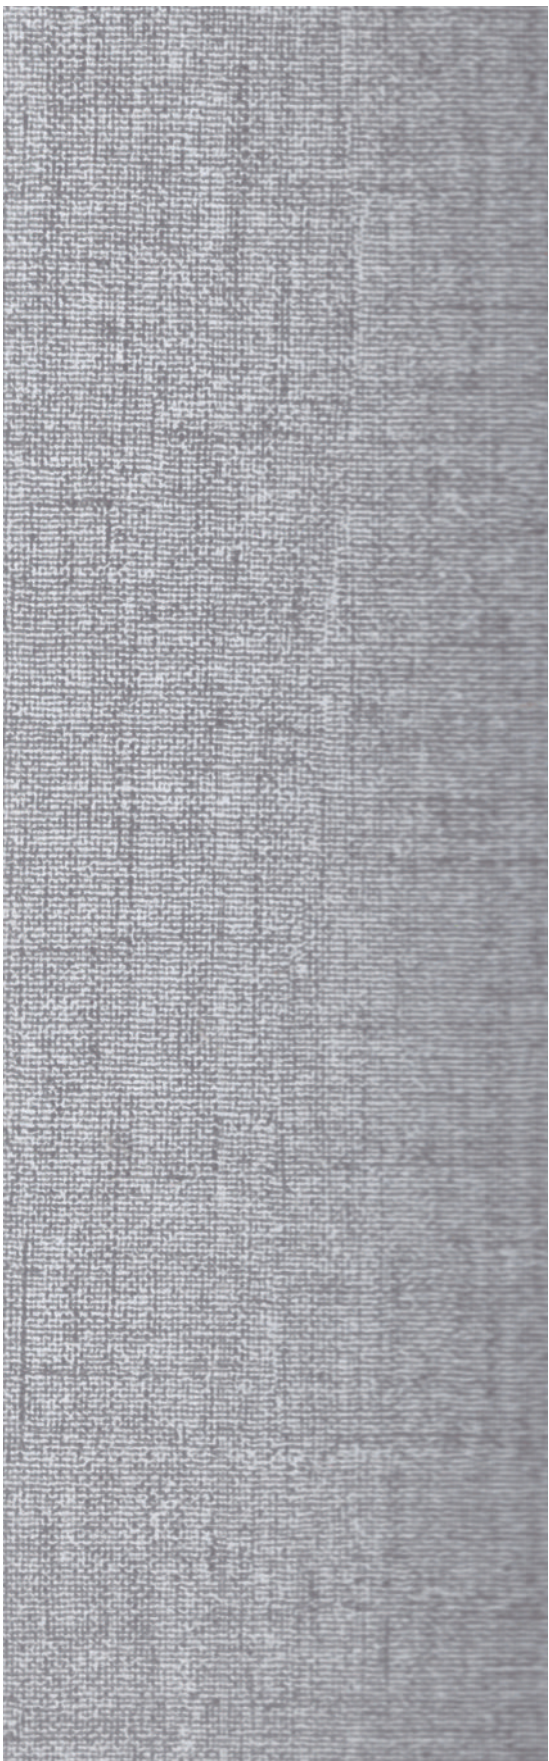

FB-205 SF | MT




FB-202 SF | MT

FABRICS



FB-272 SF | MT

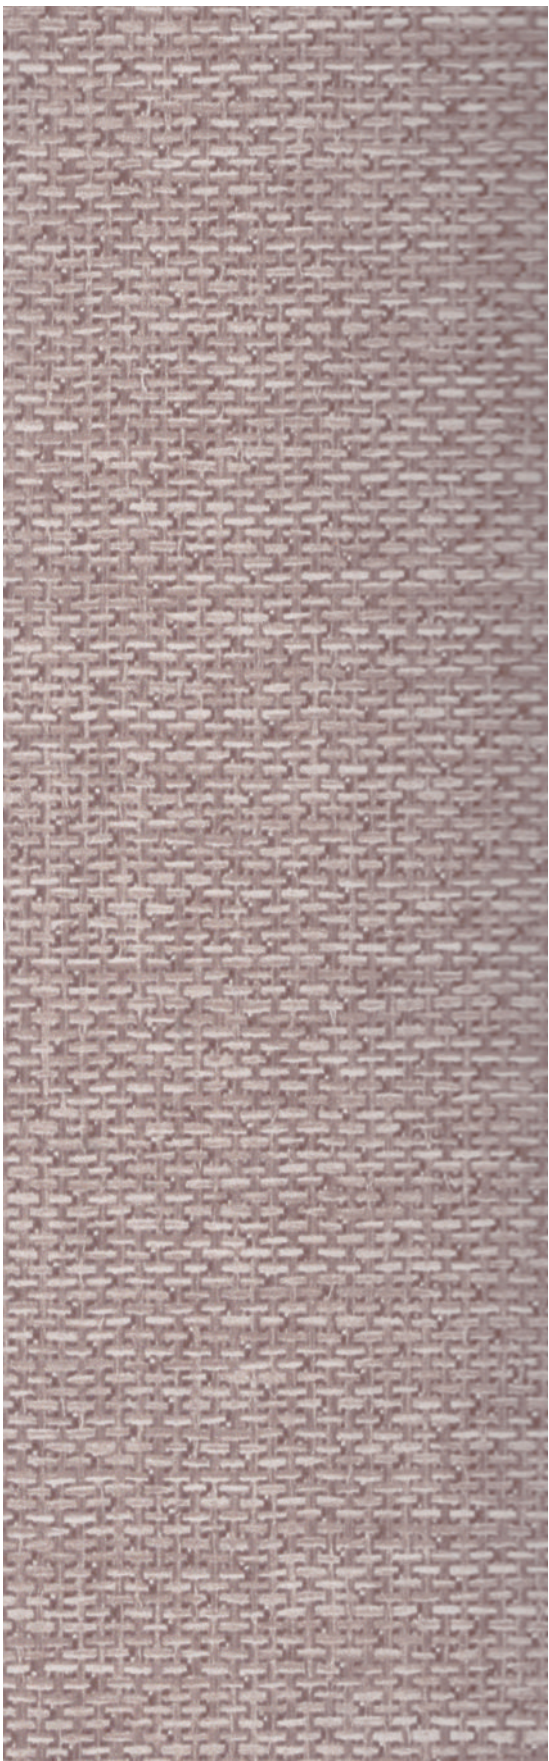


FB-251 SF | MT




FB-250 SF | MT

FABRICS

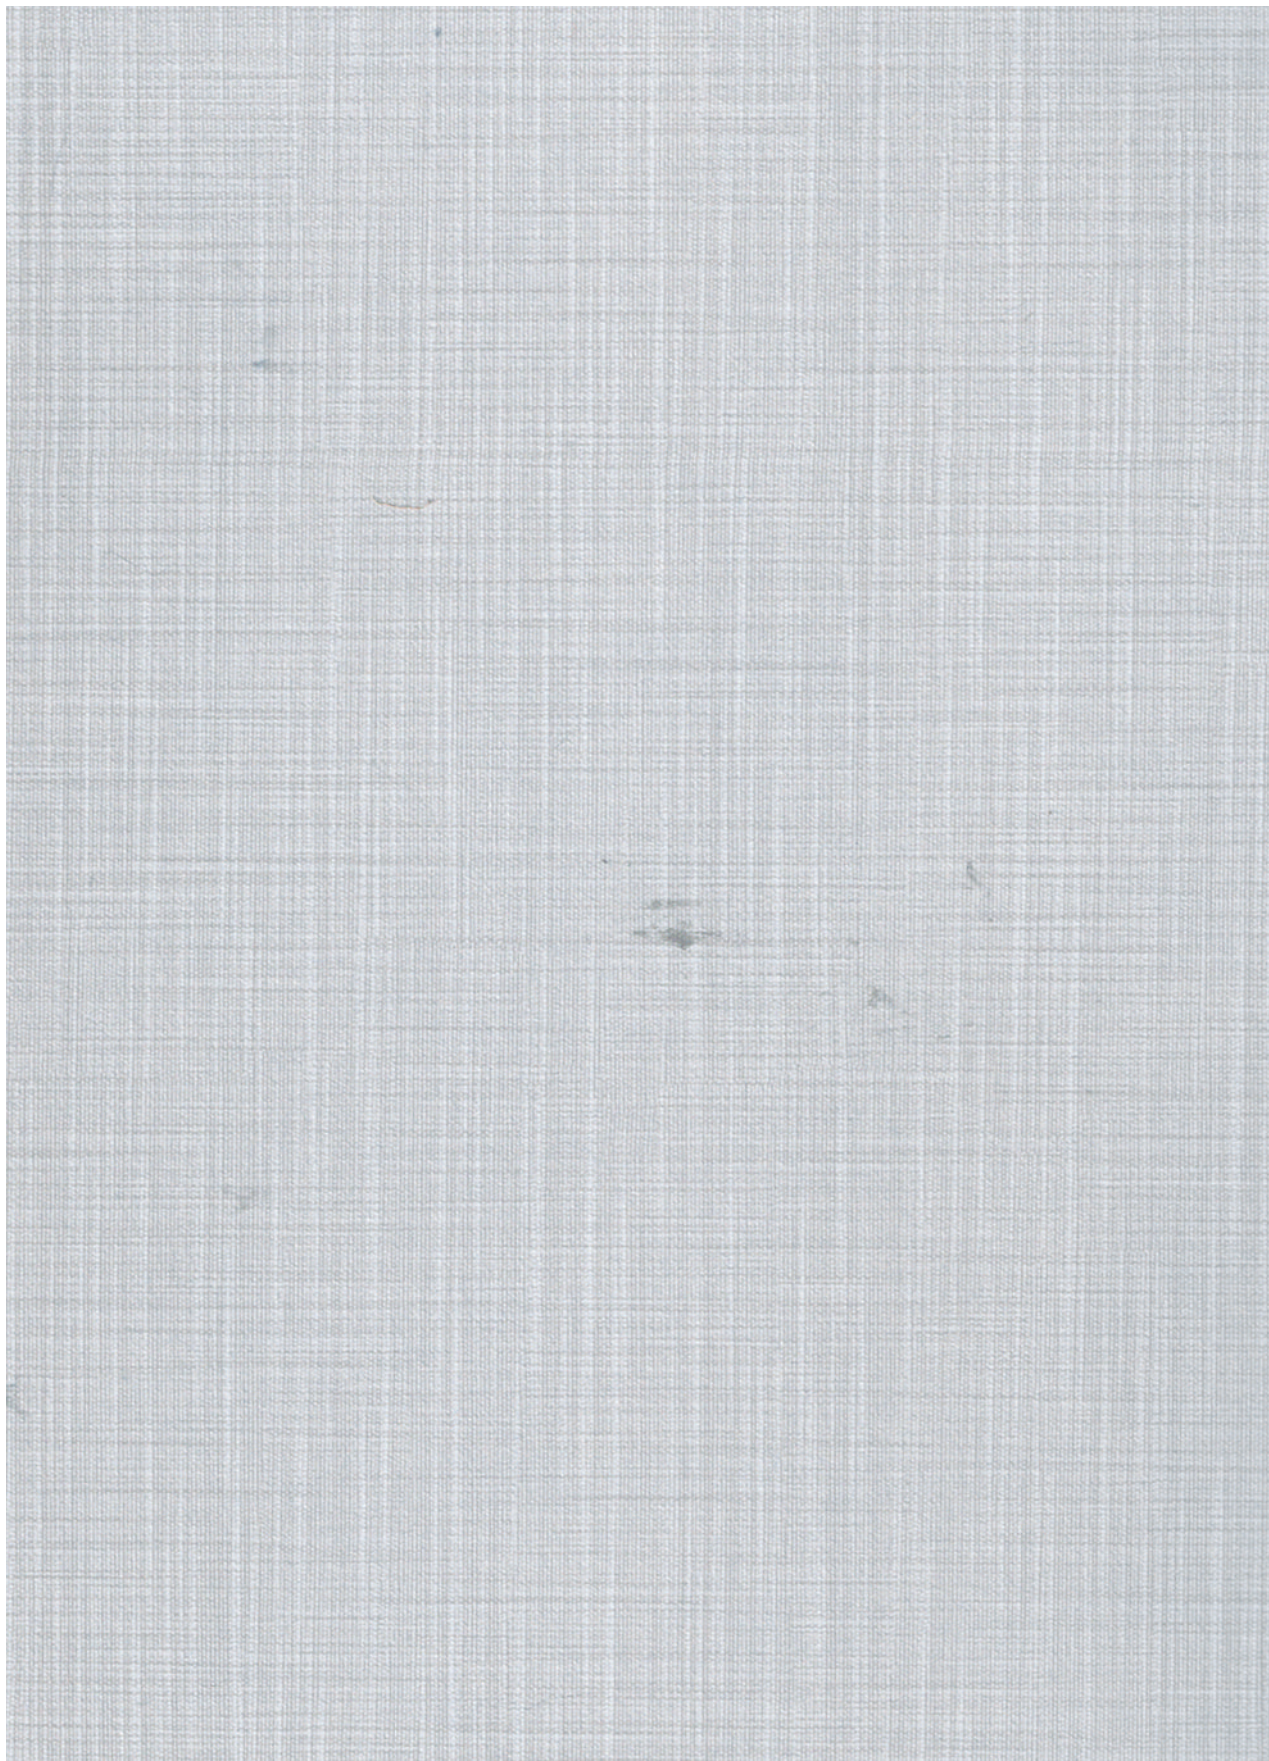

FB-206 SF | MT

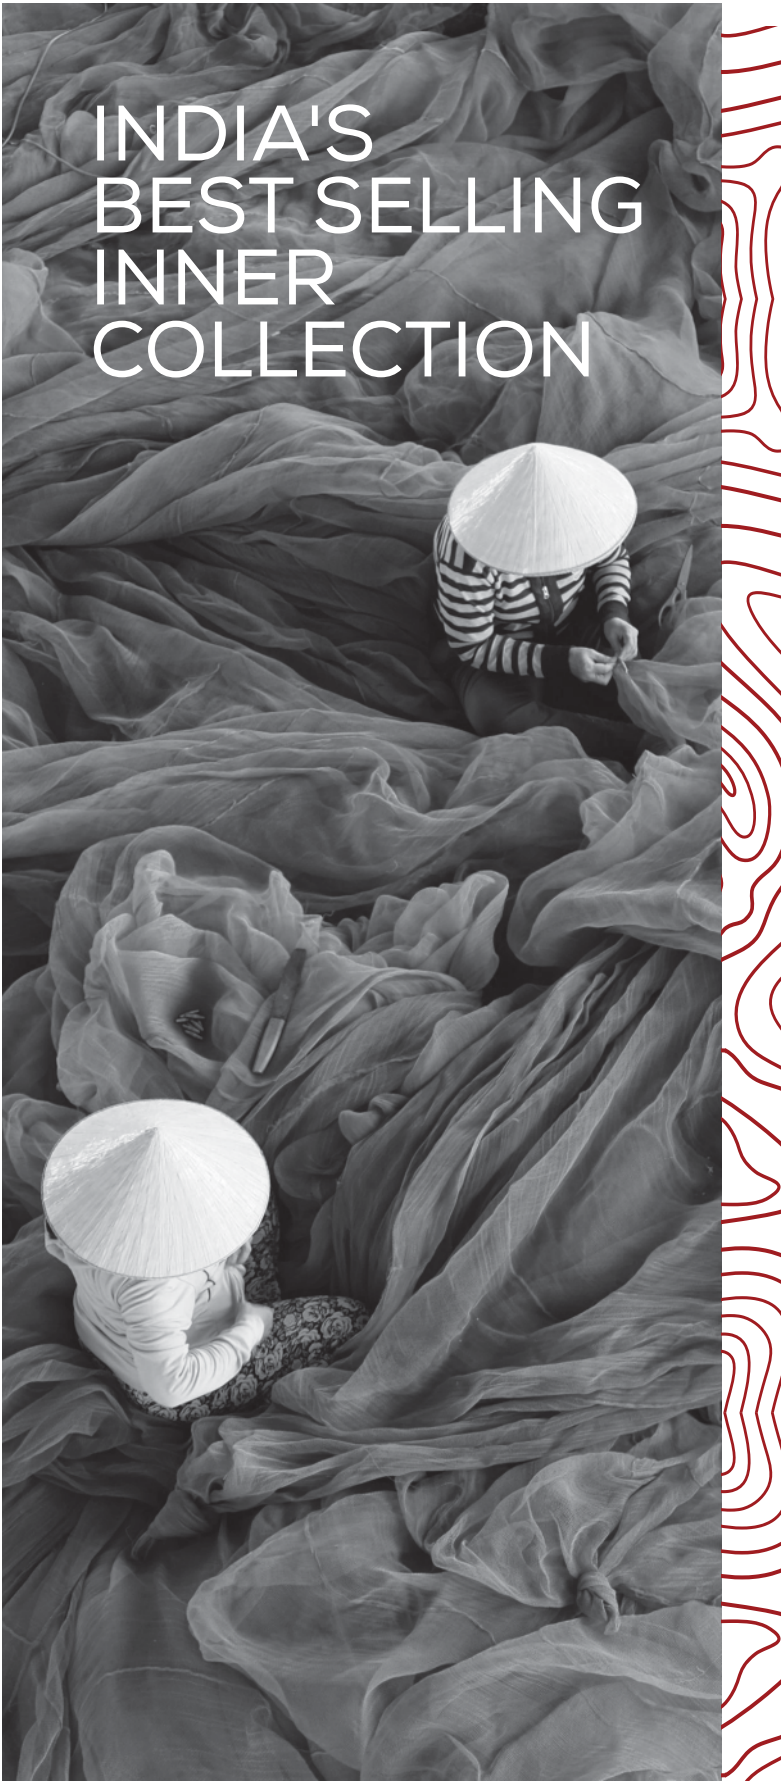

FB-295 SF | MT


FABRICS



FB-231 SF | MT



FB-230 SF | MT

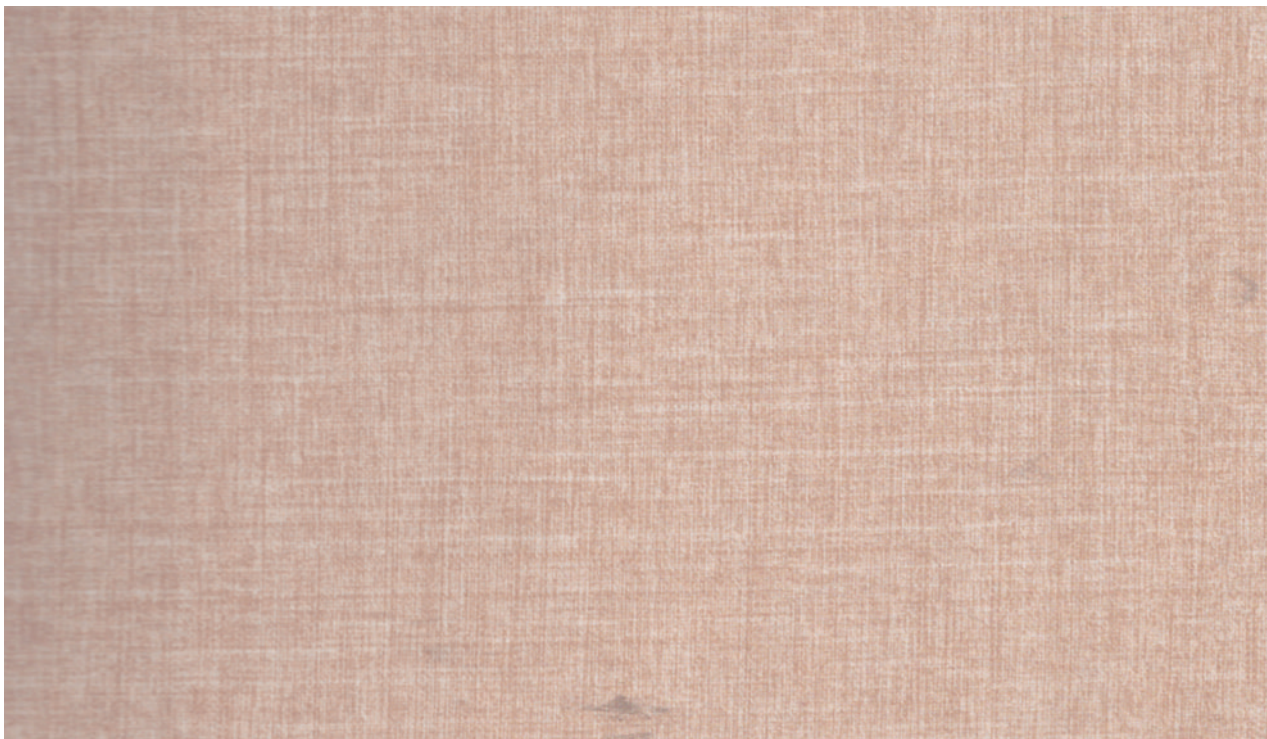

FB-209 SF | MT




FB-229 SF | MT




FB-210 SF | MT


FABRICS

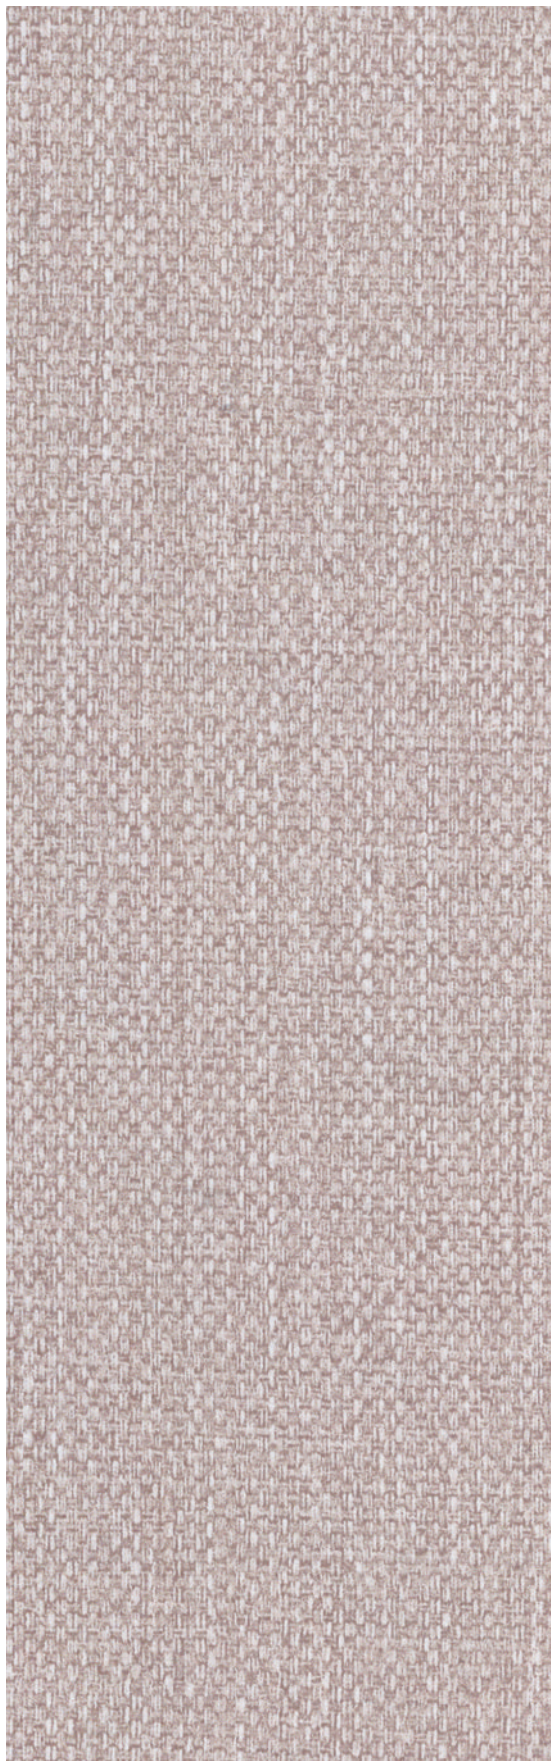

FB-281 SF | MT

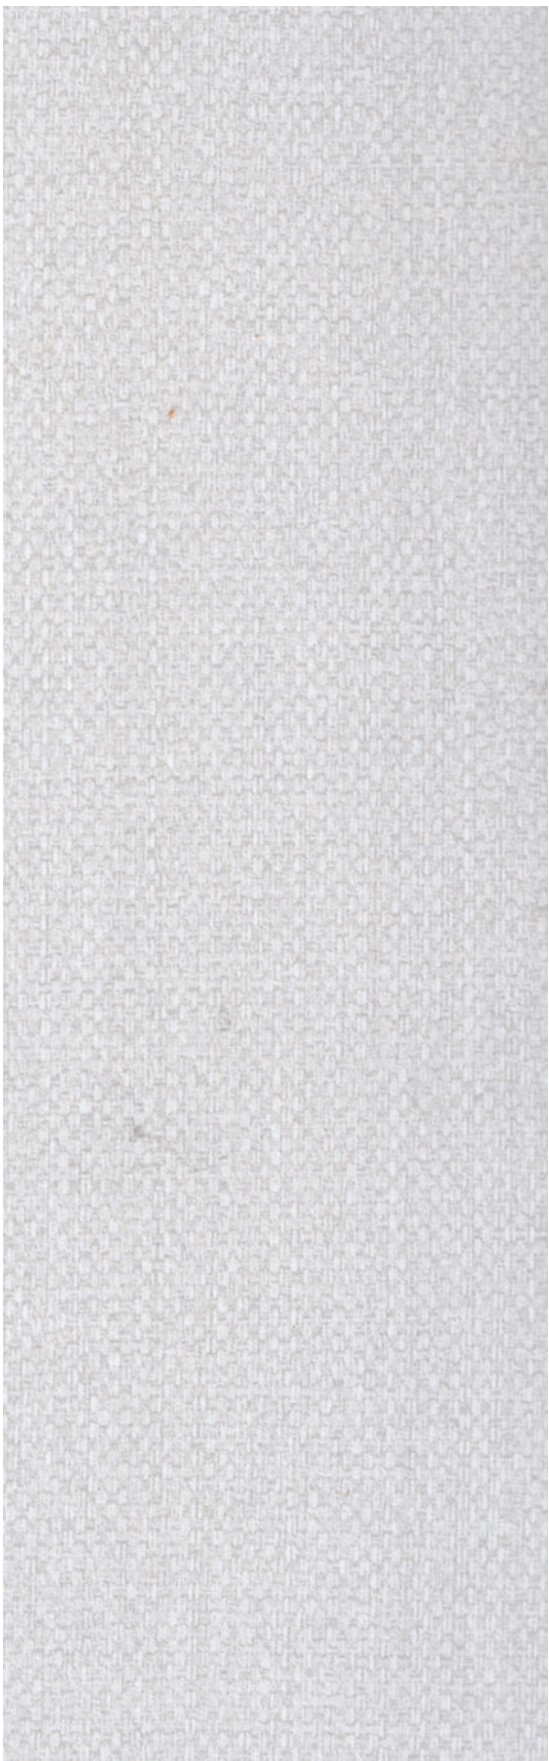


FB-225 SF | MT

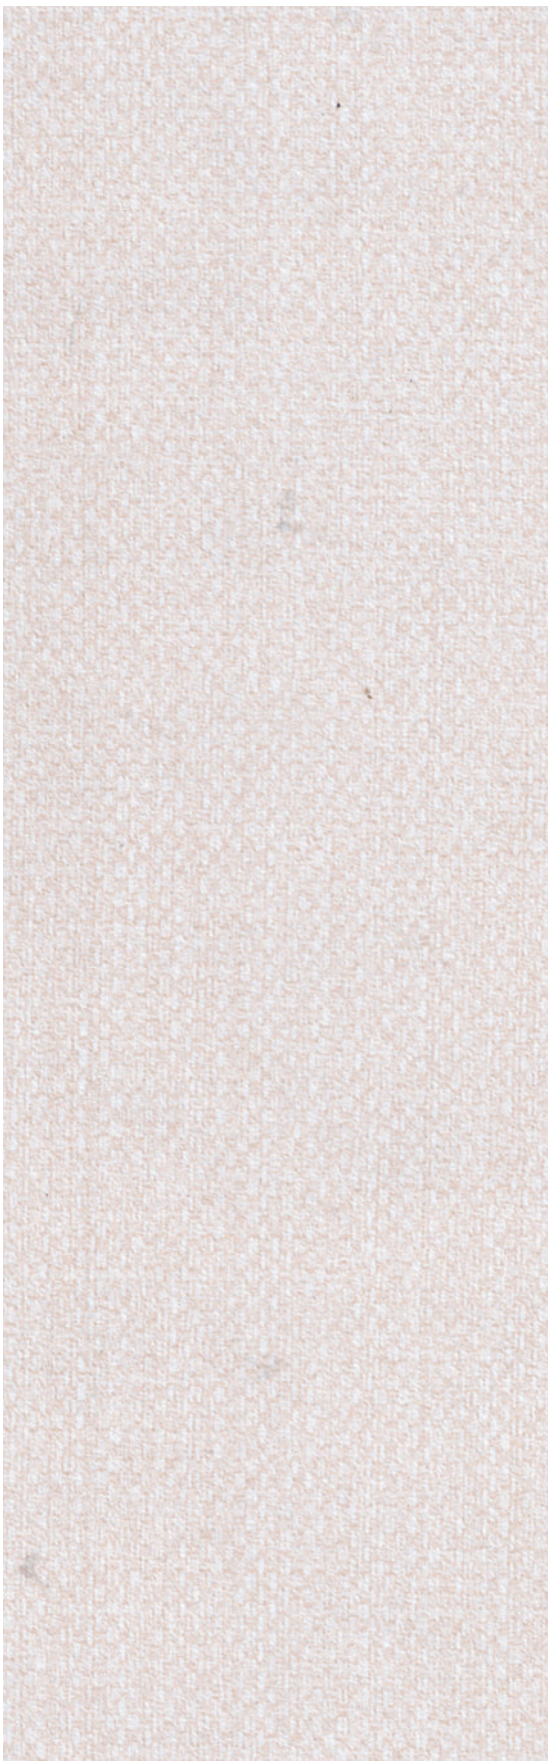

FB-226 SF | MT



FB-204 SF | MT

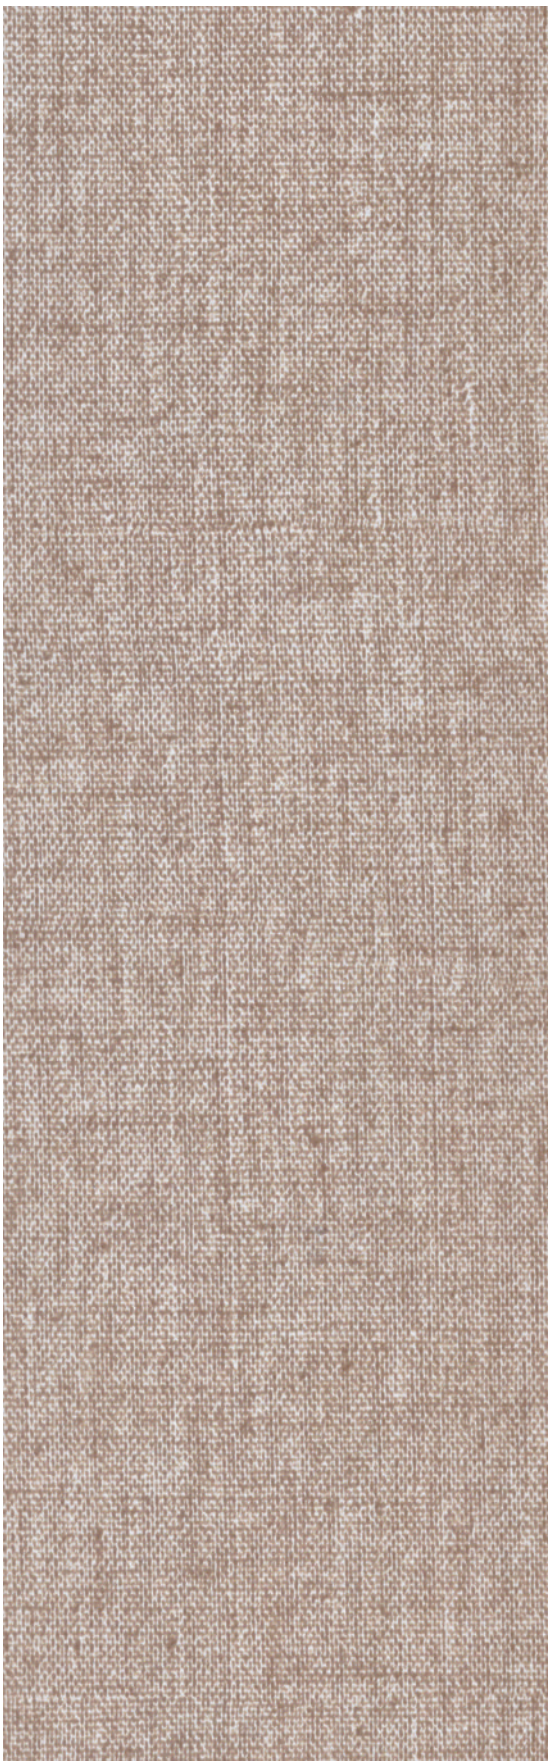

FB-223 SF | MT

WOODENS



1008-SF | MT



1009-SF | MT



1010-SF | MT



WOODENS



1026-SF | MT



1024-SF | MT



1025-SF | MT

WOODENS




1038-SF | MT



1039-SF | MT



1037-SF | MT



WOODENS



1020-SF | MT



1098-SF | MT



1099-SF | MT

WOODENS



1056-SF | MT



1054-SF | MT



1071-SF | MT



1072-SF | MT

WOODENS



1073-SF | MT



1070-SF | MT



1081-SF | MT



1087-SF | MT



WOODENS





1047-SF | MT



1053-SF | MT

COMING SOON



TECHNICAL



Size: 1220mm x 2440mm
Finishes: Suede, Matt, Glossy & Variable Texture.
Back Side Finish: Uniform Sanding gives guarantee for easy pasting.
Durability: The best technology provides high durability to our Laminates. Our Laminates are mended for life time.
Flexibility: A Specialty formulated phenol formaldebyde and melamine for formaldebyde resins with a special kind of plasticizer is used for better flexibility.
Note: Sample pasted here in represent only colour and finish, may not actual thickness. Please keep laminates away from direct sunlight.
Bonding of Laminate under high humidity, plywood with high moisture content, ply with uneven surface, inferior quality adhesive and insufficient pressure may lead to delamination / air bubbles in between ply and laminates.
The product must be inspected prior to installation and our liability will be limited to the extent of the cost of the product only.
Care & Maintenance: Wipe clean with ordinary soap or household liquid detergent. For stubborn stains, use diluted organic solvent or stain remover. Abrasive cleaners and wire brushes are not recommended.

Properties	Specified Values as per IS: 2046-1993 type S, VGS	Confirms
Resistance to surface wear	350 (Revolution)	>350 (Revolution)
Resistance to immersion in boiling water - Mass increase (%) - Thickness increase (%) - Appearance	10.0% (maximum) 11.8% (Maximum) Not worse than 4	5.0% Max. 6.5% Max.
Resistance to dry heat 180° C	Not worse than 4	
Dimensional Stability at deviated temperature - Longitudinal (%) - Transverse (%)	0.55% (Maximum) 1.025% (Maximum)	0.5% Max. 0.87% Max.
Dimensional Stability at 20° C - Longitudinal (%) - Transverse (%)	0.375% (Maximum) 0.60% (Maximum)	0.295% Max. 0.45% Max.
Resistance to impact by small diameter ball	20 N (Minimum)	25 N (Minimum)
Resistance to cracking	Not worse than 4	
Resistance to scratching	2.0 N (Minimum)	2.75 N (Minimum)
Resistance to staining	Not worse than 5	
Resistance to color change (Wool Standard) - In xenon arc light - In enclosed carbon arc light	Not worse than 5 Not worse than 5	
Resistance to cigarette burns	Not worse than 3	